PENTAIR JUNG PUMPEN


FLUTBOX

DRAINAGE PUMPS

- With powerful submersible drainage pump U5KS
- Pump with cooling jacket for motor housing
- Quick and easy hose

connection with C coupling

- Float fixation for continuous operation
- Wall mounting for storage




DESCRIPTION

The "Flutbox" is a first aid kit for draining basements in an emergency. Just place the pump with its carrying cage on the floor and pump out the water quickly and reliably via the 12.5 m fire hose (\emptyset 52 mm). When the float is locked, the pump will continue to operate until the remaining water is 35 mm deep.

The U5KS can be used as a fixed or mobile system, with or without its carrying cage, in the house and garden. If the foot strainer is removed, the free passage of 20 mm can be fully utilised.

PERFORMANCE

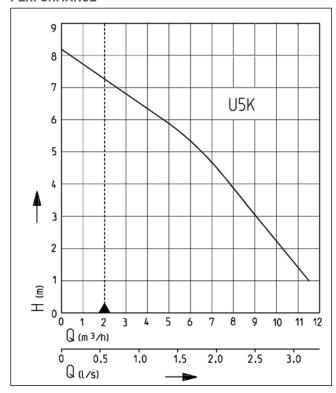

| Туре | Delivery head H [m] | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|----------|----------------------|------|------|-----|-----|-----|-----|-----|
| Floodbox | Flow rate Q [m³/h] | 11.5 | 10.5 | 9.0 | 7.5 | 6.5 | 4.5 | 2.5 |

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906 tolerances

The minimum flow velocity in the pressure piping must be $0.7\,\text{m/s}$ according to EN 12056. This data is represented in the performance curve as a limit of application.

Bauart geprüft und überwacht

TÜVRheinland
ZERTIFIZIERT





D 141-1911

FLUTBOX DRAINAGE PUMPS

SCOPE OF SUPPLY

1 U5KS cellar drainage pump; 1 fire hose, 12.5 m long, with C coupling (C52); 1 carrying cage with integrated pump fixing; 1

float fixation.

MECHANICAL DATA

| Pump | Vertical single-stage | Shaft | Stainless steel | |
|---------------------|---------------------------------|-----------------|----------------------|--|
| Free passage | 20 mm | Impeller | Vortex impeller, GFK | |
| Bearing | Ball bearings, grease-lubricat- | Motor housing | Stainless steel | |
| | ed | Pump housing | GRP | |
| Seal on motor side | Rotary shaft seal | Submersible | Yes | |
| Oil chamber | Yes | Pressure outlet | C-Kupplung | |
| Seal on medium side | 2-fold rotary shaft seals | Weight | 11 kg | |
| Run dry protection | Yes | - | | |


ELECTRICAL DATA


| Ciruit | With built-in level control | Wires | 3G1,0 | |
|-----------------|-----------------------------|--------------------|------------|--|
| Voltage | 1/N/PE~230 V | Type of enclosure | IP 68 | |
| Motor rating P1 | 0.52 kW | Insulation class | В | |
| Motor rating P2 | 0.38 kW | Winding thermostat | Yes | |
| Current | 2.3 A | Motor protection | Integrated | |
| Power line | 10m H07RN-F | Plug | Safety | |

FLUTBOX

| Туре | Code No. | |
|----------|----------|--|
| Floodbox | JP09479 | |

Dimensions Flutbox mm





09479-00